

Big TowTM

TRAILERS

Offering a full line of the highest quality construction, utility and industrial trailers on the market - 1 ton to 55 ton capacity.

MODEL:
B-8DO
DECK OVER TRAILER



B-8DO



1202 Ross Ave.
Ammon, ID 83406

www.dracoequipment.com
backhoe@cableone.net

Darren Andrews


208-520-6161
fax: 208-561-2172

Big TowTM

TRAILERS

MODEL:
B-8DO
DECK OVER TRAILER

Ramps slide together 30° apart.

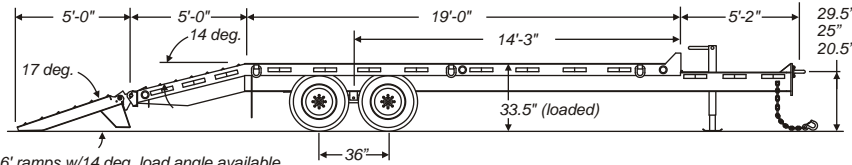

Optional 6' ramps w/14 deg. load angle available

Manufacturer reserves the right to modify, without notice, specific designs and specifications as deemed advisable on the trailer described herein without obligation in regards to trailers previously sold. Written warranty covers each trailer. No other warranty expressed or implied is made. Warranty on tires and brakes through original manufacturer. All dimensions are approximate. Some equipment shown may be optional. See your Big Tow dealer for more information.

Specifications		B-8DO
WEIGHT (lbs/kg)	5,300 / 2445	
CAPACITY (lbs/kg)	16,000 / 7258 with adequate hitch load	
DECK LENGTH (ft-in/mm)	19'-0" / 5791 w/ 5'-0" / 1524 beavertail @ 14 degrees	
DECK HEIGHT (in/mm)	33.5" / 851 loaded	
OVER-ALL WIDTH (in/mm)	8'-6" / 2591	
TONGUE LENGTH (ft-in/mm)	5'-2" / 1575	
RAMPS	Adj. 21" x 5'-0", 17 degree load angle, two-way spring assist	
DECK TYPE	2" nominal white oak wood deck, angle iron beavertail	
BRAKES	Electric with wet-cell break-away system (12.25"x3.38")	
TIRES	(4) 215/75R x 17.5, 16 ply, load range H	
WHEELS	(4) 6.75" x 17.5", 8 bolt	
AXLES	(2) 8,000 lb. spring, w/E_Z Lube hubs	
SUSPENSION	Slipper spring	
HITCH	Adj. heavy-duty 3" I.D. pintle	
TIE DOWNS	(6) Heavy duty 1" forged D-rings	
PARKING JACK	Single 12K drop-leg jack, bolted on	
SAFETY CHAINS	3/8" high tensile x 40" long with safety hooks and latches	
TOOL BOX	Std., lockable	
MUD FLAPS	Std.	
SIDE RAILS	6" channel iron	
MAIN FRAME	W10 x 17, gr. 50, one piece cold formed tongue	
HEAD BOARD	5.5" channel iron	
X-MEMBERS	High-tensile 3" jr. I-beam, 16" / 406 o.c.	
WIRING	Sealed modular harness with circuit breakers	
LIGHTING (reflectorized)	Sealed beam, flush/shock mounted	
REG. HOLDER	Std.	
FINISH (before decking)	5-stage polyurethane under and overcoat system	
OPTIONS (other options may be available)	<ul style="list-style-type: none"> ▪ Additional deck length ▪ Additional tie downs ▪ Dual parking jacks ▪ Gooseneck ▪ Recessed deck ▪ Spare tire/rim ▪ Special color (no metallic paints) ▪ Stake pockets/rub rail ▪ Tubular side rails 	<ul style="list-style-type: none"> ▪ Winch and cable ▪ 6'-0" ramps ▪ 6'-0" beavertail ▪ 8'-0" overall width