

# Big Tow<sup>TM</sup>

## TRAILERS

Offering a full line of the highest quality construction, utility and industrial trailers on the market - 1 ton to 55 ton capacity.

MODEL:  
**B-8DO**  
DECK OVER TRAILER



B-8DO



1202 Ross Ave.  
Ammon, ID 83406

[www.dracoequipment.com](http://www.dracoequipment.com)  
[backhoe@cablone.net](mailto:backhoe@cablone.net)

**Darren Andrews**


208-520-6161  
fax: 208-561-2172

# Big Tow<sup>TM</sup>

## TRAILERS

MODEL:  
**B-8DO**  
DECK OVER TRAILER

Ramps slide together 30° apart.

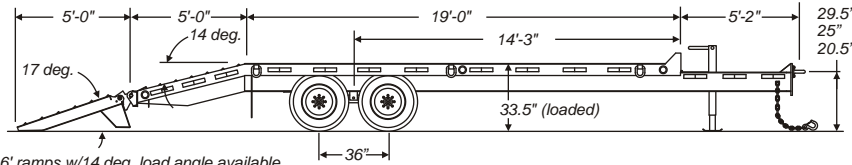

Optional 6' ramps w/14 deg. load angle available

Manufacturer reserves the right to modify, without notice, specific designs and specifications as deemed advisable on the trailer described herein without obligation in regards to trailers previously sold. Written warranty covers each trailer. No other warranty expressed or implied is made. Warranty on tires and brakes through original manufacturer. All dimensions are approximate. Some equipment shown may be optional. See your Big Tow dealer for more information.

Specifications		B-8DO
<b>WEIGHT (lbs/kg)</b>	5,300 / 2445	
<b>CAPACITY (lbs/kg)</b>	16,000 / 7258 with adequate hitch load	
<b>DECK LENGTH (ft-in/mm)</b>	19'-0" / 5791 w/ 5'-0" / 1524 beavertail @ 14 degrees	
<b>DECK HEIGHT (in/mm)</b>	33.5" / 851 loaded	
<b>OVER-ALL WIDTH (in/mm)</b>	8'-6" / 2591	
<b>TONGUE LENGTH (ft-in/mm)</b>	5'-2" / 1575	
<b>RAMPS</b>	Adj. 21" x 5'-0", 17 degree load angle, two-way spring assist	
<b>DECK TYPE</b>	2" nominal white oak wood deck, angle iron beavertail	
<b>BRAKES</b>	Electric with wet-cell break-away system (12.25"x3.38")	
<b>TIRES</b>	(4) 215/75R x 17.5, 16 ply, load range H	
<b>WHEELS</b>	(4) 6.75" x 17.5", 8 bolt	
<b>AXLES</b>	(2) 8,000 lb. spring, w/E-Z Lube hubs	
<b>SUSPENSION</b>	Slipper spring	
<b>HITCH</b>	Adj. heavy-duty 3" I.D. pintle	
<b>TIE DOWNS</b>	(6) Heavy duty 1" forged D-rings	
<b>PARKING JACK</b>	Single 12K drop-leg jack, bolted on	
<b>SAFETY CHAINS</b>	3/8" high tensile x 40" long with safety hooks and latches	
<b>TOOL BOX</b>	Std., lockable	
<b>MUD FLAPS</b>	Std.	
<b>SIDE RAILS</b>	6" channel iron	
<b>MAIN FRAME</b>	W10 x 17, gr. 50, one piece cold formed tongue	
<b>HEAD BOARD</b>	5.5" channel iron	
<b>X-MEMBERS</b>	High-tensile 3" jr. I-beam, 16" / 406 o.c.	
<b>WIRING</b>	Sealed modular harness with circuit breakers	
<b>LIGHTING (reflectorized)</b>	Sealed beam, flush/shock mounted	
<b>REG. HOLDER</b>	Std.	
<b>FINISH (before decking)</b>	5-stage polyurethane under and overcoat system	
<b>OPTIONS</b> (other options may be available)	<ul style="list-style-type: none"> <li>▪ Additional deck length</li> <li>▪ Additional tie downs</li> <li>▪ Dual parking jacks</li> <li>▪ Gooseneck</li> <li>▪ Recessed deck</li> <li>▪ Spare tire/rim</li> <li>▪ Special color (no metallic paints)</li> <li>▪ Stake pockets/rub rail</li> <li>▪ Tubular side rails</li> </ul>	<ul style="list-style-type: none"> <li>▪ Winch and cable</li> <li>▪ 6'-0" ramps</li> <li>▪ 6'-0" beavertail</li> <li>▪ 8'-0" overall width</li> </ul>