

Big TowTM


TRAILERS

MODELS:

B-9, B-10, B-12

DECK OVER TRAILER

Manufacturer reserves the right to modify, without notice, specific designs and specifications as deemed advisable on the trailer described herein without obligation in regards to trailers previously sold. Written warranty covers each trailer. No other warranty expressed or implied is made. Warranty on tires and brakes through original manufacturer. All dimensions are approximate. Some equipment shown may be optional. See your Big Tow Trailers dealer for details.

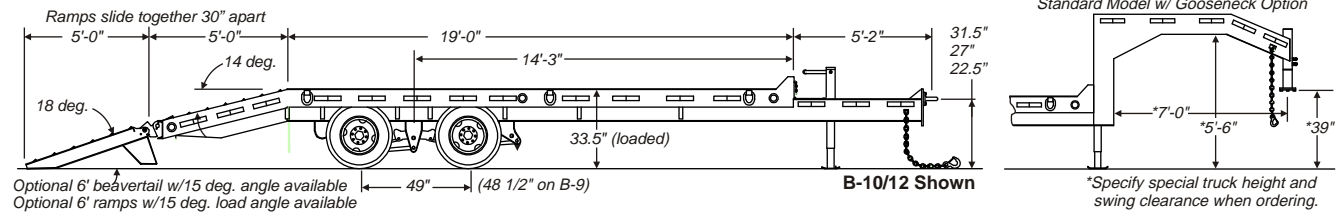

Specifications	B-9	B-10	B-12
WEIGHT (lbs/kg)	5,880 / 2667	5,900 / 2676	7,240 / 3284
CAPACITY (lbs/kg)	18,000 / 8165 w/adequate hitch load	20,000 / 9072 w/adequate hitch load	24,000 / 10,886 w/adequate hitch load
DECK LENGTH (ft-in/mm)	19' / 5791 w/ 5'-0" / 1524 beavertail @14 deg.	19' / 5791 w/ 5'-0" / 1524 beavertail @14 deg.	19' / 5791 w/ 5'-0" / 1524 beavertail @14 deg.
DECK HEIGHT (in/mm)	33.5" / 851 loaded	33.5" / 851 loaded	33.5" / 851 loaded
OVER-ALL WIDTH (ft-in/mm)	8'-6" / 2591	8'-6" / 2591	8'-6" / 2591
TONGUE LENGTH (ft-in/mm)	5'-2" / 1575	5'-2" / 1575	5'-2" / 1575
RAMP	Adj. 21" x 5'-0" long, two-way spring assist	Adj. 21" x 5'-0" long, two-way spring assist	Adj. 21" x 5'-0" long, two-way spring assist
DECK TYPE	2" nominal white oak, flush deck	2" nominal white oak, flush deck	2" nominal white oak, flush deck
BRAKES	Electric, w/wet-cell break-away (12.25 x 3.38")	Electric, w/wet-cell break-away (12.25 x 4")	Electric, w/wet-cell break-away (12.25 x 5")
TIRES	(8) 235/85R x 16, 10 ply, load range E	(8) 235/85R x 16, 10 ply, load range E	(8) 235/85 x 16 Bias 12 ply
WHEELS	(8) 6" x 16", budd type, 8 bolt	(8) 6" x 16", budd type, 8 bolt	(8) 6" x 16", budd type, 8 bolt
AXLES	(2) 9,000 lb. with oil bath bearings	(2) 10,000 lb., heavy-duty, oil bath bearings	(2) 12,000 lb., heavy-duty, oil bath bearings
SUSPENSION	Slipper spring	9700 Hutchens, adjustable	9700 Hutchens, adjustable
HITCH	Adj. heavy-duty 3" I.D. pintle ring	Adj. heavy-duty 3" I.D. pintle ring	Adj. heavy-duty 3" I.D. pintle ring
TIE DOWNS	(6) heavy-duty 1" forged D-rings	(6) heavy-duty 1" forged D-rings	(6) heavy-duty 1" forged D-rings
PARKING JACK	Single 12K drop-leg, bolt-on	Single 12K drop-leg, bolt-on	Single 12K drop-leg, bolt-on
SAFETY CHAINS	3/8" high tensile x 40" w/hooks and latches	3/8" high tensile x 40" w/hooks and latches	1/2" high tensile x 40" w/hooks and latches
TOOL BOX	Std. (lockable)	Std. (lockable)	Std. (lockable)
MUD FLAPS	Std.	Std.	Std.
SIDE RAILS	8 channel iron	8 channel iron	8 channel iron
MAIN FRAME	W10 x 17, gr. 50, one piece cold formed tongue	W10 x 17, gr. 50, one piece cold formed tongue	W10 x 17, gr. 50, one piece cold formed tongue
HEAD BOARD	5.5" high channel iron	5.5" high channel iron	5.5" high channel iron
X-MEMBERS	High tensile 3" jr. I-beam, 16" o.c.	High tensile 3" jr. I-beam, 16" o.c.	High tensile 3" jr. I-beam, 16" o.c.
WIRING	Sealed modular harness	Sealed modular harness	Sealed modular harness
LIGHTING (reflectorized)	Sealed beam, flush/shock mounted	Sealed beam, flush/shock mounted	Sealed beam, flush/shock mounted
REG. HOLDER	Std.	Std.	Std.
FINISH (before decking)	5-stage polyurethane under/over coat	5-stage polyurethane under/over coat	5-stage polyurethane under/over coat
NOTE	Subject to Federal Excise Tax		
OPTIONS (other options may be available)	<ul style="list-style-type: none"> Additional deck length Additional tie-downs Double-break beavertail Dual parking jacks Gooseneck Spare tire/rim Special color (no metallic) Stake pocket/rub rail Winch and cable 6'-0" ramps 6'-0" beavertail 8'-0" overall width 25,000 lb. two-speed jack 	<ul style="list-style-type: none"> Additional deck length Additional tie-downs Double-break beavertail Dual parking jacks Full air brakes w/ ABS & park brake Gooseneck Spare tire/rim Special color (no metallic) Stake pocket/rub rail Winch and cable 6'-0" ramps 6'-0" beavertail 8'-0" overall width 25,000 lb. two-speed jack 	<ul style="list-style-type: none"> Additional deck length Additional tie-downs Double-break beavertail Dual parking jacks Full air brakes w/ ABS & park brake Gooseneck Spare tire/rim Special color (no metallic) Stake pocket/rub rail Winch and cable 6'-0" ramps 6'-0" beavertail 8'-0" overall width 25,000 lb. two-speed jack Radial Tires