


Big TowTM

TRAILERS

MODELS:
B-25RG, B-35RG
RIGID GOOSENECK TRAILER

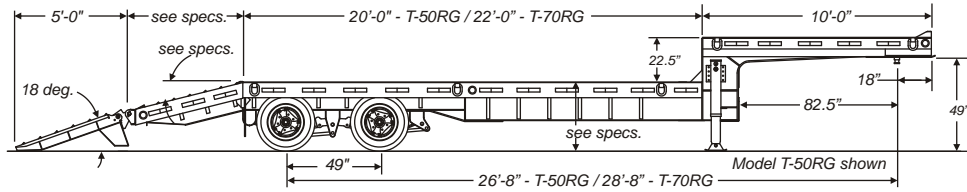

Optional 6' ramps w/15 deg. load angle available

Manufacturer reserves the right to modify, without notice, specific designs and specifications as deemed advisable on the trailer described herein without obligation in regards to trailers previously sold. Written warranty covers each trailer. No other warranty expressed or implied is made. Warranty on tires and brakes through original manufacturer. All dimensions are approximate. Some equipment shown may be optional. See your Big Tow dealer for details.

Specifications	B-25RG	B-35RG		
WEIGHT (lbs/kg)	11,500 / 5216			
CAPACITY (lbs/kg)	50,000 / 22,680 with adequate hitch load	70,000 / 31,752 with adequate hitch load		
DECK LENGTH (ft-in/mm)	20'-0" / 6096 deck, 10'-0" / 3048 top, 5'-0" / 1524 beavertail @ 14 deg.	22'-0" / 6706 deck, 10'-0" / 3048 top, 4'-0" / 1219 beavertail @ 16 deg.		
DECK HEIGHT (in/mm)	33.5" / 851 loaded	36.5" / 927 unloaded		
OVER-ALL WIDTH (ft-in/mm)	8'-6" / 2591	8'-6" / 2591		
SWING CLEARANCE (in/mm)	82.5" / 2096 – Please specify if other than standard	82.5" / 2096 – Please specify if other than standard		
TRUCK HEIGHT (in/mm)	49" (1245mm)	49" (1245mm)		
RAMPS	Adj., 21" x 5'-0" lg., 18-deg. Load angle, 2-way spring assist	Adj., 21" x 5'-0" lg., 18-deg. Load angle, 2-way spring assist		
DECK TYPE	2" nominal white oak (flush deck), angle iron beavertail	Full 2" white oak (flush deck), angle iron beavertail		
BRAKES	Full air, 12.25 x 7.5 both axles (w/ABS on front axle – park brake on all)	Full air, 12.25 x 7.5 all axles (w/ABS on front axle – park brake on all)		
TIRES	(8) 215/75R x 17.5, 16-ply, load range H	(8) 235/75R x 17.5, 16-ply, load range H		
WHEELS	(8) 6.75 x 17.5 cast spoke	(8) 6.75 x 17.5 cast spoke		
AXLES	(2) 22,500 lb. w/oil bath bearings	(2) 25,000 lb. w/oil bath bearings		
SUSPENSION	9700 Hutchens, adjustable	9700 Hutchens, adjustable		
AUTO. SLACK ADJ.	Standard	Standard		
HITCH	King pin	King pin		
TIE DOWNS	(10) heavy-duty 1" forged D-rings	(10) heavy-duty 1" forged D-rings		
PARKING JACK	(2) 25,000 lb., two-speed (bolted on)	(2) 25,000 lb., two-speed (bolted on)		
TOOL BOX	Optional	Optional		
MUD FLAPS	Standard	Standard		
SIDE RAILS	8" channel iron (main deck), 6" channel iron (top deck)	10" channel iron (main deck)		
MAIN FRAME	W16 x 26, grade 50	W16 x 50		
X-MEMBERS	High tensile 3" Jr. I-beam, 16" on center w/gussets	W6 x 9 beam, 16" on center		
WIRING	Sealed modular harness with circuit breakers	Sealed modular harness with circuit breakers		
LIGHTING (reflectORIZED)	Sealed beam, flush/shock mounted	Sealed beam, flush/shock mounted		
REG. HOLDER	Standard	Standard		
FINISH (before decking)	5-stage polyurethane under and overcoat system	5-stage polyurethane under and overcoat system		
NOTE	Subject to Federal Excise Tax	Subject to Federal Excise Tax		
OPTIONS (other options may be available)	<ul style="list-style-type: none"> ▪ ABS brakes on both axles ▪ Additional deck length ▪ Additional tie downs ▪ Budd wheels (shown on front) ▪ Double break beavertail (7'-6") w/ 6' ramps ▪ Out-riggers ▪ Aluminum ramps to load top deck (14 deg. incline) 	<ul style="list-style-type: none"> ▪ Spare tire/rim ▪ Special color (no metallic paints) ▪ Stake pockets/rub rail ▪ Tool box ▪ Winch and cable ▪ 6'-0" beavertail / 6'-0" ramps ▪ 8'-0" over-all width 	<ul style="list-style-type: none"> ▪ ABS brakes on both axles ▪ Additional deck length ▪ Additional tie downs ▪ Bolsters (open wheels 34 1/2" deck height) ▪ Budd wheels ▪ Out riggers ▪ 70" aluminum ramps to load gooseneck (20 deg. incline) ▪ Spare tire/rim 	<ul style="list-style-type: none"> ▪ Special color (no metallic paints) ▪ Stake pockets/rub rail ▪ Tool box ▪ Triple axle ▪ Winch and cable ▪ 30 degree neck (adds 40" to deck length) ▪ 8'-0" over-all width
		*Note: 5' and 6' beavertails are not available on the T-70RG		

TOLL FREE: 866-397-8481 Fax: 320-693-7921 www.bigtowtrailers.com

1651535 - 4/2006