





Manufacturer reserves the right to modify, without notice, specific designs and specifications as deemed advisable on the trailer described herein without obligation in regards to trailers previously sold. Written warranty covers each trailer. No other warranty expressed or implied is made. Warranty on tires and brakes through original manufacturer. All dimensions are approximate. Some equipment shown may be optional. See your Big Tow dealer for details.

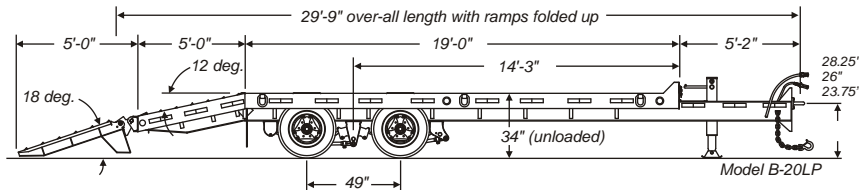

Optional 6' beavertail w/10 deg. angle available  
Optional 6' ramps w/15 deg. load angle available

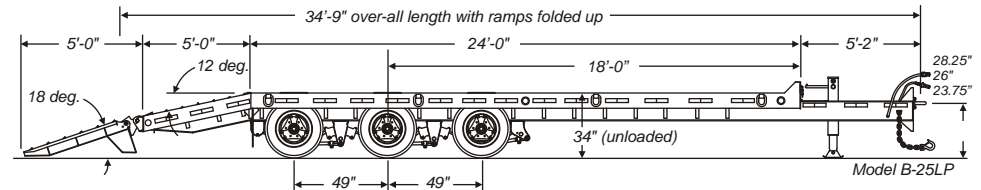

Optional 6' beavertail w/10 deg. angle available  
Optional 6' ramps w/15 deg. load angle available

### Specifications

#### B-20LP "Low Profile"

#### B-25LP "Low Profile"

<b>WEIGHT (lbs/kg)</b>	8,400 / 3810	11,000 / 4990
<b>CAPACITY (lbs/kg)</b>	40,000 / 18,144 with adequate hitch load	50,000 / 22,680 with adequate hitch load
<b>DECK LENGTH (ft-in/mm)</b>	19'-0" / 5791 with 5'-0" / 1524 beavertail @ 12 deg.	24'-0" / 5791 with 5'-0" / 1524 beavertail @ 12 deg.
<b>DECK HEIGHT (in/mm)</b>	34" / 864 unloaded	34" / 864 unloaded
<b>OVER-ALL WIDTH (ft-in/mm)</b>	8'-6" / 2591	8'-6" / 2591
<b>OVER-ALL LENGTH (ft-in/mm)</b>	29'-9" / 9068 with ramps in travel position	34'-9" / 10,592 with ramps in travel position
<b>TONGUE LENGTH (ft-in/mm)</b>	5'-2" (1575mm)	5'-2" (1575mm)
<b>RAMPS</b>	Adj., 21" x 5'-0" lg., 18-deg. Load angle, 2-way spring assist	Adj., 21" x 5'-0" lg., 18-deg. Load angle, 2-way spring assist
<b>DECK TYPE</b>	2" nominal white oak (flush deck), angle iron beavertail	2" nominal white oak (flush deck), angle iron beavertail
<b>BRAKES</b>	Full air, 12.25 x 7.5 both axles (w/ABS on front axle – park brake on all)	Air, 12.25 x 7.5 w/ ABS (2s/2m) & park brake on all axles
<b>TIRES</b>	(8) 215/75R x 17.5, 16-ply, load range H	(12) 215/75R x 17.5, 16-ply, load range H
<b>WHEELS</b>	(8) 6.75 x 17.5 cast spoke	(12) 6.75 x 17.5 cast spoke
<b>AXLES</b>	(2) 22,500 lb. w/oil bath bearings	(3) 22,500 lb. w/oil bath bearings
<b>SUSPENSION</b>	9700 Hutchens, adjustable	9700 Hutchens, adjustable
<b>AUTO. SLACK ADJ.</b>	Standard	Standard
<b>HITCH</b>	Adjustable, heavy-duty 3" I.D. pintle ring	Adjustable, heavy-duty 3" I.D. pintle ring
<b>TIE DOWNS</b>	(6) heavy-duty 1" forged D-rings	(8) heavy-duty 1" forged D-rings
<b>PARKING JACK</b>	(1) 25,000 lb., two-speed (bolted on)	(1) 25,000 lb., two-speed (bolted on)
<b>SAFETY CHAINS</b>	1/2" high tensile x 40" with safety latch hooks	5/8" gr. 80 high tensile x 40" with safety latch hooks
<b>TOOL BOX</b>	Standard, lockable	Standard, lockable
<b>MUD FLAPS</b>	Standard	Standard
<b>SIDE RAILS</b>	8" channel iron	8" channel iron
<b>MAIN FRAME</b>	W10 x 26, grade 50, cold-formed tongue	W10 x 26, grade 50, cold-formed tongue
<b>HEAD BOARD</b>	5-1/2" high, channel iron	5-1/2" high, channel iron
<b>X-MEMBERS</b>	High tensile 3" Jr. I-beam, 16" on center	High tensile 3" Jr. I-beam, 16" on center
<b>WIRING</b>	Sealed modular harness with circuit breakers	Sealed modular harness with circuit breakers
<b>LIGHTING (reflectorized)</b>	Sealed beam, flush/shock mounted	Sealed beam, flush/shock mounted
<b>REG. HOLDER</b>	Standard	Standard
<b>FINISH (before decking)</b>	5-stage polyurethane under and overcoat system	5-stage polyurethane under and overcoat system
<b>NOTE</b>	Subject to Federal Excise Tax	Subject to Federal Excise Tax
<b>OPTIONS (other options may be available)</b>	<ul style="list-style-type: none"> <li>▪ ABS brakes on both axles</li> <li>▪ Additional deck length</li> <li>▪ Additional tie downs</li> <li>▪ Budd wheels</li> <li>▪ Dual parking jacks</li> <li>▪ Outriggers</li> </ul>	<ul style="list-style-type: none"> <li>▪ Spare tire/rim</li> <li>▪ Special color (no metallic paints)</li> <li>▪ Stake pockets/rub rail</li> <li>▪ Winch and cable</li> <li>▪ 6'-0" ramps w/6'-0" beavertail</li> <li>▪ 8'-0" over-all width</li> </ul>
		<ul style="list-style-type: none"> <li>▪ ABS brakes on 2 or 3 axles</li> <li>▪ Lift Axle Option</li> <li>▪ Additional deck length</li> <li>▪ Additional tie downs</li> <li>▪ Budd wheels</li> <li>▪ Dual parking jacks</li> <li>▪ Outriggers</li> </ul>
		<ul style="list-style-type: none"> <li>▪ Spare tire/rim</li> <li>▪ Special color (no metallic paints)</li> <li>▪ Stake pockets/rub rail</li> <li>▪ Winch and cable</li> <li>▪ 6'-0" ramps w/6'-0" beavertail</li> <li>▪ 8'-0" over-all width</li> </ul>

TOLL FREE: 866-397-8481 Fax: 320-693-7921 [www.bigtowtrailers.com](http://www.bigtowtrailers.com)

1651596 - 4/2006