


Big TowTM

TRAILERS

MODEL:
B-5P
PAN TRAILER

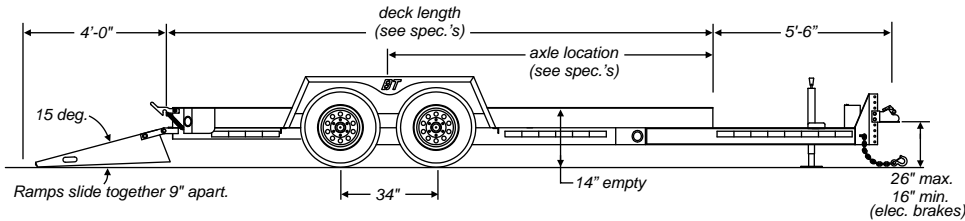

Manufacturer reserves the right to modify, without notice, specific designs and specifications as deemed advisable on the trailer described herein without obligation in regards to trailers previously sold. Written warranty covers each trailer. No other warranty expressed or implied is made. Warranty on tires and brakes through original manufacturer. All dimensions are approximate. Some equipment shown may be optional. See your Big Tow dealer for more information. Some equipment shown may be optional. See your Big Tow dealer for more information.

Specifications

B-5P "Pan"

WEIGHT (lbs/kg)	2,500 / 1134 or 2,650 / 1202 or 2,800 / 1270 or 2,950 / 1338 or 3,100 / 1406	
CAPACITY (lbs/kg)	10,000 / 4536 with adequate hitch load	
DECK LENGTH (ft-in/mm)	12'-0" / 3658 or 14'-0" / 4267 or 16'-0" / 4877 or 18'-0" / 5486 or 20'-0" / 6096	
DECK HEIGHT (in/mm)	14" / 356 empty	
OVER-ALL WIDTH (ft-in/mm)	8'-6" / 2591	
LOAD WIDTH (in/mm)	77" / 1956 between fenders	
TONGUE LENGTH (ft-in/mm)	5'-6" / 1676	
RAMPS	Adj. 4'-0" x 16" / 1219 x 406, mesh top, 15-deg. Load angle (5' ramps are 12-deg., 6' ramps are 10-deg.)	
DECK TYPE	2" nominal white oak wood only	
BRAKES	Electric with wet-cell break-away system (12"x2")	
TIRES	(4) ST225/75R x 15, load range D	
WHEELS	(4) 6" x 15" white modular (6 bolt on 5.5" b.c.)	
AXLES	(2) 6,000 lb. Torflex with E-Z Lube hubs	
AXLE LOCATION (ft-in/mm)	7'-2" / 2184 or 8'-5" / 2565 or 9'-7" / 2921 or 10'-10" / 3302 or 12'-0" / 3658	
HITCH	Adj. 2-5/6" ball coupler or 3" I.D. pintle	
TIE DOWNS	Heavy duty 3/4" forged D-rings	
PARKING JACK	Single 7K drop-leg jack, bolted on	
SAFETY CHAINS	3/8" high tensile x 40" long with safety hooks and latches	
TOOL BOX	Std. (Lid optional)	
MUD FLAPS	Std.	
SIDE RAILS	7" high	
MAIN FRAME	(Tongue) High-tensile W6 x 12 beam	
HEAD BOARD	7" channel iron	
X-MEMBERS	High-tensile 3" jr. I-beam, 16" / 406 o.c.	
WIRING	Sealed modular harness with circuit breakers	
LIGHTING (reflectORIZED)	Sealed beam, flush/shock mounted	
REG. HOLDER	Std.	
FINISH (before decking)	5-stage polyurethane under and overcoat system	
OPTIONS (other options may be available)	<ul style="list-style-type: none"> ▪ Additional tie downs ▪ Full width ramps ▪ Gooseneck ▪ Hyd. Surge brakes w/free backing (additional optional equipment may be required.) ▪ Mini-fifth wheel ▪ Nev-R-Lube hubs ▪ Spare tire/rim ▪ Spare tire carrier ▪ Special color (no metallics) 	<ul style="list-style-type: none"> ▪ Tool box lid ▪ Winch and cable ▪ 12,000 lb. drop-leg jack ▪ B-6P (6 ton capacity) ▪ Pallet fork holders ▪ Wood top ramps ▪ 5' or 6' ramps ▪ L.E.D. lighting