




# Big Tow<sup>TM</sup>

## TRAILERS

MODEL:  
**B-9B**

DROP DECK BEAVERTAIL

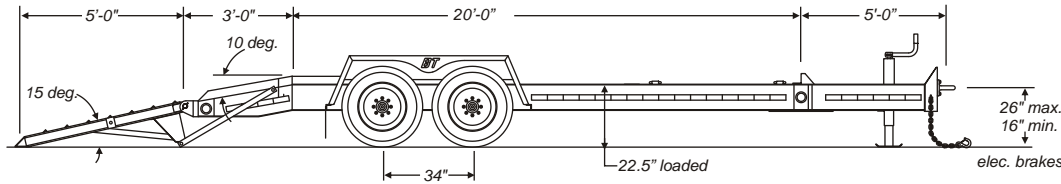

Manufacturer reserves the right to modify, without notice, specific designs and specifications as deemed advisable on the trailer described herein without obligation in regards to trailers previously sold. Written warranty covers each trailer. No other warranty expressed or implied is made. Warranty on tires and brakes through original manufacturer. All dimensions are approximate. Some equipment shown may be optional. See your Big Tow dealer for more information.

### Specifications

B-9B

<b>WEIGHT (lbs/kg)</b>	4,660 / 2114	
<b>CAPACITY (lbs/kg)</b>	18,000 / 8165 with adequate hitch load	
<b>DECK LENGTH (ft-in/mm)</b>	20'-0" / 6096	
<b>DECK HEIGHT (in/mm)</b>	22.5" / 572 empty	
<b>OVER-ALL WIDTH (ft-in/mm)</b>	8'-6" / 2591	
<b>LOAD WIDTH (in/mm)</b>	82" / 2083 between fenders	
<b>TONGUE LENGTH (ft-in/mm)</b>	5'-0" / 1524	
<b>RAMPS</b>	Adj. 5'-0" x 19.25" / 1524 x 489, spring assist, 15-deg. Load angle	
<b>DECK TYPE</b>	2" nominal white oak wood only	
<b>BRAKES</b>	Electric with wet-cell break-away system (12.25"x3.38")	
<b>TIRES</b>	(4) 215/75R x 17.5, load range H	
<b>WHEELS</b>	(4) 6.75" x 17.5", 8 bolt	
<b>AXLES</b>	(2) 10,000 lb. Torflex with E-Z Lube hubs	
<b>HITCH</b>	Adj. 3" I.D. pintle	
<b>TIE DOWNS</b>	(6) Heavy duty 3/4" forged D-rings	
<b>PARKING JACK</b>	Single 12K drop-leg jack, bolted on	
<b>SAFETY CHAINS</b>	3/8" high tensile x 40" long with safety hooks and latches	
<b>TOOL BOX</b>	Std. (Lid optional)	
<b>MUD FLAPS</b>	Std.	
<b>SIDE RAILS (in/mm)</b>	3" / 76 high	
<b>MAIN FRAME</b>	High-tensile W10 x 17 beam (one piece cold formed tongue)	
<b>HEAD BOARD</b>	4" channel iron	
<b>X-MEMBERS</b>	High-tensile 3" jr. I-beam, 16" / 406 o.c.	
<b>WIRING</b>	Sealed modular harness with circuit breakers	
<b>LIGHTING (reflectorized)</b>	Sealed beam, flush/shock mounted	
<b>REG. HOLDER</b>	Std.	
<b>FINISH (before decking)</b>	5-stage polyurethane under and overcoat system	
<b>OPTIONS (other options may be available)</b>	<ul style="list-style-type: none"> <li>▪ Additional tie downs</li> <li>▪ Attachment holders</li> <li>▪ Full width ramps</li> <li>▪ Gooseneck</li> <li>▪ Slipper spring suspension</li> <li>▪ Spare tire/rim</li> <li>▪ Spare tire carrier</li> <li>▪ Special color (no metallics)</li> </ul>	<ul style="list-style-type: none"> <li>▪ Vertical boring machine option: both ramps mounted to same side</li> <li>▪ Winch and cable</li> <li>▪ 2-5/16" ball coupler</li> <li>▪ 25,000 lb. two-speed jack</li> <li>▪ Stake pockets/rub rail</li> <li>▪ Tool box lid</li> </ul>