




# Big Tow™ TRAILERS

MODELS:  
**B-7, B-8**  
DROP DECK

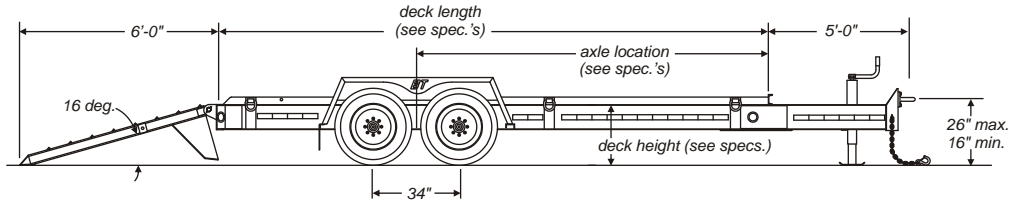

Manufacturer reserves the right to modify, without notice, specific designs and specifications as deemed advisable on the trailer described herein without obligation in regards to trailers previously sold. Written warranty covers each trailer. No other warranty expressed or implied is made. Warranty on tires and brakes through original manufacturer. All dimensions are approximate. Some equipment shown may be optional. See your Big Tow dealer for more information.

Specifications	B-7	B-8
<b>WEIGHT (lbs/kg)</b>	3,700 / 1678 or 3,900 / 1769 or 4,100 / 1860	4,100 / 1860
<b>CAPACITY (lbs/kg)</b>	14,000 / 6350 with adequate hitch load	16,000 / 7258 with adequate hitch load
<b>DECK LENGTH (ft-in/mm)</b>	16'-0" / 4877 or 18'-0" / 5486 or 20'-0" / 6096	20'-0" / 6096
<b>DECK HEIGHT (in/mm)</b>	21" / 533 loaded	22.5" / 572 loaded
<b>OVER-ALL WIDTH (ft-in/mm)</b>	8'-6" / 2591	8'-6" / 2591
<b>LOAD WIDTH (ft-in/mm)</b>	84" / 2134 between fenders	82" / 2083 between fenders
<b>TONGUE LENGTH (ft-in/mm)</b>	5'-0" (1524mm)	5'-0" (1524mm)
<b>RAMPS</b>	Adj., 19 1/4" wide x 6'-0" long, spring assist, 16 deg. load angle	Adj., 19 1/4" wide x 6'-0" long, spring assist, 16 deg. load angle
<b>DECK TYPE</b>	2" nominal white oak	2" nominal white oak
<b>BRAKES</b>	electric, with wet cell break-a-way system, both axles (12-1/4" x 2-1/2")	electric, with wet cell break-a-way system, both axles (12-1/4" x 3-3/8")
<b>TIRES</b>	(4) 215/75R x 17.5, 16 ply, load range H	(4) 215/75R x 17.5, 16 ply, load range H
<b>WHEELS</b>	(4) 6.75" x 17.5", 8 bolt	(4) 6.75" x 17.5", 8 bolt
<b>AXLES</b>	(2) 7,200 lb., Torflex, with E-Z lube hubs	(2) 8,000 lb., Torflex, with E-Z lube hubs
<b>AXLE LOCATION (in/mm)</b>	115" / 2926 or 130" / 3292 or 144" / 3658	144" / 3658
<b>HITCH</b>	Adj. 3" i.d. pintle ring	Adj. 3" i.d. pintle ring
<b>TIE DOWNS</b>	(6) heavy-duty 3/4" forged D-rings	(6) heavy-duty 3/4" forged D-rings
<b>PARKING JACK</b>	Single 12K drop-leg, bolted on	Single 12K drop-leg, bolted on
<b>SAFETY CHAINS</b>	3/8" high tensile x 40" with safety hooks/latches	3/8" high tensile x 40" with safety hooks/latches
<b>TOOL BOX</b>	Std. (Lid optional)	Std. (Lid optional)
<b>MUD FLAPS</b>	Standard	Standard
<b>SIDE RAILS</b>	5 x 3 x 1/4" angle iron	3 x 2 x 1/4" angle iron
<b>MAIN FRAME</b>	high tensile W10 x 12 beam (one piece cold formed tongue)	high tensile W10 x 17 beam (one piece cold formed tongue)
<b>HEAD BOARD</b>	4" high (channel iron)	4" high (channel iron)
<b>X-MEMBERS</b>	High tensile 3" Jr. I-beam, 16" on center	High tensile 3" Jr. I-beam, 16" on center
<b>WIRING</b>	Sealed modular harness with circuit breakers	Sealed modular harness with circuit breakers
<b>LIGHTING (reflectorized)</b>	Sealed beam, flush/shock mounted	Sealed beam, flush/shock mounted
<b>REG. HOLDER</b>	Standard	Standard
<b>FINISH (before decking)</b>	5-stage polyurethane under and overcoat system	5-stage polyurethane under and overcoat system
<b>OPTIONS (other options may be available)</b>	<ul style="list-style-type: none"> <li>▪ Additional tie downs</li> <li>▪ Beavertail (3'-0" @ 10 degree)</li> <li>▪ Full width ramps</li> <li>▪ Gooseneck</li> <li>▪ Spare tire/rim</li> <li>▪ Spare tire carrier</li> <li>▪ Pallet fork holders</li> <li>▪ Special color (no metallic paints)</li> <li>▪ Stake pockets/rub rail</li> <li>▪ Tool box lid</li> <li>▪ Winch and cable</li> </ul>	<ul style="list-style-type: none"> <li>▪ 25,000 lb., two speed jack</li> <li>▪ L.E.D. lighting</li> <li>▪ Wood top ramps</li> <li>▪ 2-5/16" ball coupler</li> </ul>
		<ul style="list-style-type: none"> <li>▪ Additional tie downs</li> <li>▪ Beavertail (3'-0" @ 10 degree)</li> <li>▪ Full width ramps</li> <li>▪ Gooseneck</li> <li>▪ Spare tire/rim</li> <li>▪ Spare tire carrier</li> <li>▪ Pallet fork holders</li> <li>▪ Special color (no metallic paints)</li> <li>▪ Stake pockets/rub rail</li> <li>▪ Tool box lid</li> <li>▪ Winch and cable</li> </ul>