




# Big Tow™ TRAILERS

MODELS:  
**B-15, B-20**  
DECK OVER TRAILER

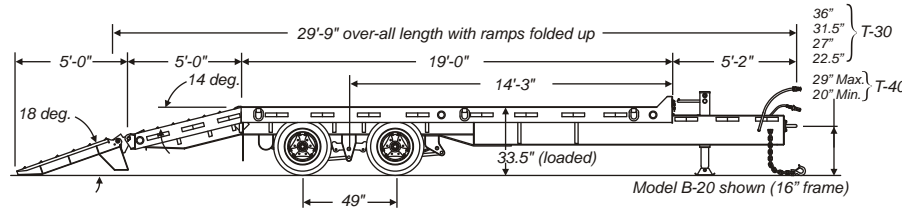

Optional 6" beavertail w/8 deg. angle available  
Optional 6" ramps w/15 deg. load angle available

Manufacturer reserves the right to modify, without notice, specific designs and specifications as deemed advisable on the trailer described herein without obligation in regards to trailers previously sold. Written warranty covers each trailer. No other warranty expressed or implied is made. Warranty on tires and brakes through original manufacturer. All dimensions are approximate. Some equipment shown may be optional. See your Big Tow dealer for more information.

Specifications	B-15	B-20
<b>WEIGHT (lbs/kg)</b>	8,450 / 3833	8,500 / 3856
<b>CAPACITY (lbs/kg)</b>	30,000 / 13,608 with adequate hitch load	40,000 / 18,144 with adequate hitch load
<b>DECK LENGTH (ft-in/mm)</b>	19'-0" / 5791 with 5'-0" / 1524 beavertail @ 14 deg.	19'-0" / 5791 with 5'-0" / 1524 beavertail @ 14 deg.
<b>DECK HEIGHT (in/mm)</b>	33.5" / 851 loaded	33.5" / 851 loaded
<b>OVER-ALL WIDTH (ft-in/mm)</b>	8'-6" / 2591	8'-6" / 2591
<b>OVER-ALL LENGTH (ft-in/mm)</b>	29'-9" / 9068 with ramps in travel position	29'-9" / 9068 with ramps in travel position
<b>TONGUE LENGTH (ft-in/mm)</b>	5'-2" (1575mm)	5'-2" (1575mm)
<b>RAMPS</b>	Adj., 21" x 5'-0" lg., 18-deg. Load angle, 2-way spring assist	Adj., 21" x 5'-0" lg., 18-deg. Load angle, 2-way spring assist
<b>DECK TYPE</b>	2" nominal white oak (flush deck), angle iron beavertail	2" nominal white oak (flush deck), angle iron beavertail
<b>BRAKES</b>	Electric w/ wet-cell break-away system (12.25" x 5")	Full air, 12.25 x 7.5 both axles (w/ABS on front axle - park brake on all)
<b>TIRES</b>	(8) 215/75R x 17.5, 16-ply, load range H	(8) 215/75R x 17.5, 16-ply, load range H
<b>WHEELS</b>	(8) 6.75 x 17.5 (budd type)	(8) 6.75 x 17.5 cast spoke
<b>AXLES</b>	(2) 15,000 lb. w/oil bath bearings	(2) 22,500 lb. w/oil bath bearings
<b>SUSPENSION</b>	9700 Hutchens, adjustable	9700 Hutchens, adjustable
<b>AUTO. SLACK ADJ.</b>	N/A	Standard
<b>HITCH</b>	Adjustable, heavy-duty 3" I.D. pintle ring	Adjustable, heavy-duty 3" I.D. pintle ring
<b>TIE DOWNS</b>	(6) heavy-duty 1" forged D-rings	(6) heavy-duty 1" forged D-rings
<b>PARKING JACK</b>	(1) 25,000 lb., two-speed (bolted on)	(1) 25,000 lb., two-speed (bolted on)
<b>SAFETY CHAINS</b>	1/2" high tensile x 40" with safety latch hooks	1/2" high tensile x 40" with safety latch hooks
<b>TOOL BOX</b>	Standard, lockable	Standard, lockable
<b>MUD FLAPS</b>	Standard	Standard
<b>SIDE RAILS</b>	8" channel iron	8" channel iron
<b>MAIN FRAME</b>	W10 x 26, grade 50, cold-formed tongue	W16 x 26, grade 50, cold-formed tongue
<b>HEAD BOARD</b>	5-1/2" high, channel iron	5-1/2" high, channel iron
<b>X-MEMBERS</b>	High tensile 3" Jr. I-beam, 16" on center	High tensile 3" Jr. I-beam, 16" on center
<b>WIRING</b>	Sealed modular harness with circuit breakers	Sealed modular harness with circuit breakers
<b>LIGHTING (reflectorized)</b>	Sealed beam, flush/shock mounted	Sealed beam, flush/shock mounted
<b>REG. HOLDER</b>	Standard	Standard
<b>FINISH (before decking)</b>	5-stage polyurethane under and overcoat system	5-stage polyurethane under and overcoat system
<b>NOTE</b>	Subject to Federal Excise Tax	Subject to Federal Excise Tax
<b>OPTIONS (other options may be available)</b>	<ul style="list-style-type: none"> <li>▪ Additional deck length</li> <li>▪ Additional tie downs</li> <li>▪ Dual parking jacks</li> <li>▪ Outriggers</li> <li>▪ Recessed deck</li> <li>▪ Spare tire/rim</li> </ul>	<ul style="list-style-type: none"> <li>▪ Special color (no metallic paints)</li> <li>▪ Stake pockets/rub rail</li> <li>▪ Tubular side rails</li> <li>▪ Winch and cable</li> <li>▪ 6'-0" ramps</li> <li>▪ 6'-0" beavertail</li> <li>▪ 8'-0" over-all width</li> </ul>
		<ul style="list-style-type: none"> <li>▪ ABS brakes on both axles</li> <li>▪ Additional deck length</li> <li>▪ Additional tie downs</li> <li>▪ Aluminum extension ramps</li> <li>▪ Budd wheels</li> <li>▪ Double-break beavertail</li> <li>▪ Dual parking jacks</li> <li>▪ Outriggers</li> <li>▪ Recessed deck</li> <li>▪ Spare tire/rim</li> <li>▪ Special color (no metallic paints)</li> <li>▪ Stake pockets/rub rail</li> <li>▪ Winch and cable</li> <li>▪ 6'-0" ramps w/6'-0" beavertail</li> <li>▪ 8'-0" over-all width</li> </ul>

TOLL FREE: 866-397-8481 Fax: 320-693-7921 [www.bigtowtrailers.com](http://www.bigtowtrailers.com)

1651523 - 4/2006